






Ein- An- Aufbauleuchte  
**SURFACE PANEL Alternate**

**object & store.**  
 RETAIL LIGHTING SOLUTIONS

LED



Up to **44W** Power  
 up to **5900lm** Lumen  
**3000K** / **4000K** CCT

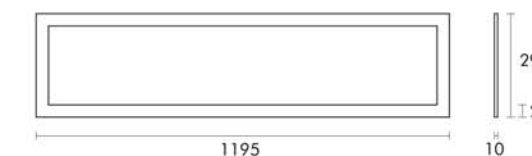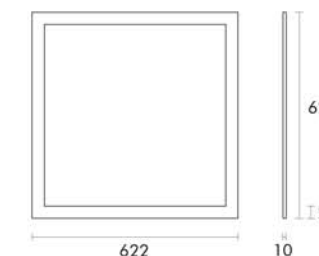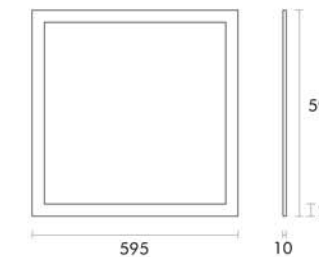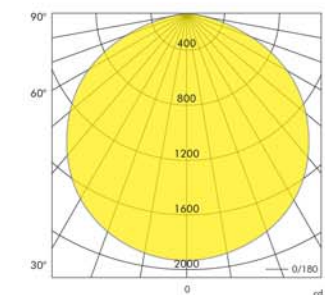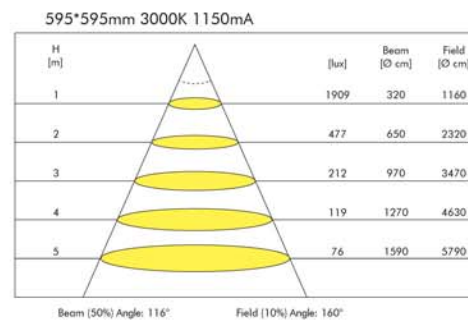

Quick connector (included)



Complete system includes: fixture, plug, driver and quick connector

UGR	UGR >19				UGR <19					
	Size		Size		Size		Size			
	595*595mm		622*622mm		1195*295mm		595*595mm		622*622mm	
	44W @ max. 1150mA				37,5W @ max. 950mA					
	CRI >80Ra									
	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
	5620lm	5720lm	5700lm	5830lm	5800lm	5900lm	4800lm	4880lm	4610lm	4680lm
	139lm/W	141lm/W	142lm/W	145lm/W	143lm/W	146lm/W	141lm/W	144lm/W	135lm/W	137lm/W
	LOR >80%									
	Driver Not included, available options in driver list									
	Cover PMMA Opal Diffuser									

Product Information

Panel List

Product Name	Color	LED Lumen	CCT	CRI	Cooling	System Power	Cover	Size
LED panel 595	White	max 5620lm	3000K	>80Ra	Passive	max 44W	Matt Opal	595*595mm
LED panel 595	White	max 5720lm	4000K	>80Ra	Passive	max 44W	Matt Opal	595*595mm
LED panel 622	White	max 5700lm	3000K	>80Ra	Passive	max 44W	Matt Opal	622*622mm
LED panel 622	White	max 5830lm	4000K	>80Ra	Passive	max 44W	Matt Opal	622*622mm
LED panel 1195	White	max 5800lm	3000K	>80Ra	Passive	max 44W	Matt Opal	1195*295mm
LED panel 1195	White	max 5900lm	4000K	>80Ra	Passive	max 44W	Matt Opal	1195*295mm
LED panel 595 UGR<19	White	max 4800lm	3000K	>80Ra	Passive	max 37.5W	Matt Opal	595*595mm
LED panel 595 UGR<19	White	max 4880lm	4000K	>80Ra	Passive	max 37.5W	Matt Opal	595*595mm
LED panel 622 UGR<19	White	max 4610lm	3000K	>80Ra	Passive	max 37.5W	Matt Opal	622*622mm
LED panel 622 UGR<19	White	max 4680lm	4000K	>80Ra	Passive	max 37.5W	Matt Opal	622*622mm



Ceiling frame 595 for surface mounting (not included)



Ceiling frame 622 for surface mounting (not included)



Ceiling frame 1195 for surface mounting (not included)



Pendant set (not included)

On Request

Description	
Ceiling frame 595 (size 605*600*50mm)	Pendant set (4*1200mm cable)
Ceiling frame 622 (size 630*630*50mm)	
Ceiling frame 1195 (size 1205*300*50mm)	

Product Name	Output Current	Maximum Driver Power	Dimmable
LED driver with primary and secondary quick connector	850mA	36W	-
LED driver with primary and secondary quick connector	950mA	40W	-
LED driver with primary and secondary quick connector	1150mA	48W	-
LED driver OTE50 with primary and secondary quick connector	800mA	43W	-
LED driver OTE50 with primary and secondary quick connector	925mA	50W	-
LED driver OTE50 with primary and secondary quick connector	1150mA	41W	-
LED driver OTi50 with primary and secondary quick connector	800mA	43W	DALI
LED driver OTi50 with primary and secondary quick connector	950mA	51W	DALI
LED driver OTi50 with primary and secondary quick connector	1150mA	55W	DALI
LED driver with primary and secondary quick connector	920mA	40W	1-10V

Driver List