Einbauleuchte
DOWNLIGHT mini 16W

object & store.
RETAIL LIGHTING SOLUTIONS

Fixed & Tiltable

Fixed
| Cutout Size | ⌀ 65mm |

Tiltable
| Cutout Size | ⌀ 75mm |

16W	Up to 1490lm	2700K 3000K 4000K
Power	Lumen	CCT

CE RoHS 25° IP20 0.8 m F

Product Information

System Power	16W		
CRI	>90Ra		
CCT	2700K	3000K	4000K
LED Lumen	1210lm	1320lm	1490lm
LED Efficacy	93lm/W	102lm/W	115lm/W
LOR	Up to 90%		
Driver	350mA Dimmable Driver (included) Leading Edge / Trailing Edge / 1-10V		
Reflector	24°	32° included	50°

Dimmable Driver ——— LED Fixture

System includes: fixture and driver

Description			
Reflector 24° for LED spot 16W	fixed/tiltable	-	1-10v or DALI dimmable driver available on request
Reflector 50° for LED spot 16W	fixed/tiltable		
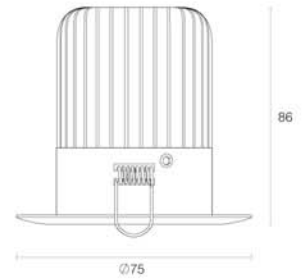
86

⌀75

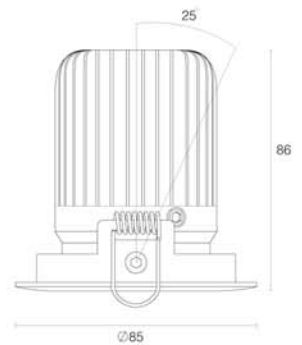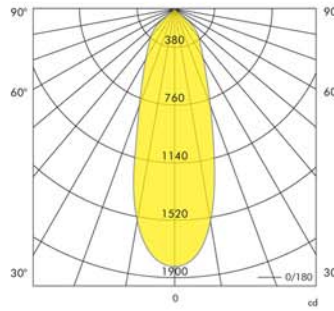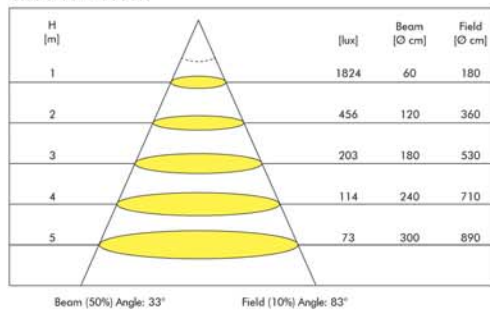| Product Name		Color	LED Lumen	CCT	CRI	Cooling	LED Power	Reflector	Cutout Size
LED spot	CRI90 round fixed 16W	Chrome	1210lm	2700K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Brushed Alu.	1210lm	2700K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Sandy White	1210lm	2700K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Black	1210lm	2700K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Chrome	1320lm	3000K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Brushed Alu.	1320lm	3000K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Sandy White	1320lm	3000K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Black	1320lm	3000K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Chrome	1490lm	4000K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Brushed Alu.	1490lm	4000K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Sandy White	1490lm	4000K	>90Ra	Passive	13W	32°	Ø 65mm
LED spot	CRI90 round fixed 16W	Black	1490lm	4000K	>90Ra	Passive	13W	32°	Ø 65mm

Product List

CRI90 16W 3000K

H [m]	[lux]	Beam [Ø cm]	Field [Ø cm]
1	1824	60	180
2	456	120	360
3	203	180	530
4	114	240	710
5	73	300	890

Beam (50%) Angle: 33°   Field (10%) Angle: 83°

90° / 60° / 30° polar diagram: 380 / 760 / 1140 / 1520 / 1900 cd — 0/180

25

86

⌀85

Product Name		Color	LED Lumen	CCT	CRI	Cooling	LED Power	Reflector	Cutout Size
LED spot	CRI90 round tiltable 16W	Chrome	1210lm	2700K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Brushed Alu.	1210lm	2700K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Sandy White	1210lm	2700K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Black	1210lm	2700K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Chrome	1320lm	3000K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Brushed Alu.	1320lm	3000K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Sandy White	1320lm	3000K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Black	1320lm	3000K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Chrome	1490lm	4000K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Brushed Alu.	1490lm	4000K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Sandy White	1490lm	4000K	>90Ra	Passive	13W	32°	Ø 75mm
LED spot	CRI90 round tiltable 16W	Black	1490lm	4000K	>90Ra	Passive	13W	32°	Ø 75mm

Product List